## STATE OF HAWAII DEPARTMENT OF HAWAIIAN HOME LANDS

Land Development Division

W. (1900)	NOV	0 9	2015	
		Dat	е	

# ADDENDUM NO. 2 TO INVITATION FOR BIDS

# IFB-16-HHL-007 INDIVIDUAL WASTEWATER SYSTEM REPLACEMENT, LALAMILO PHASE 1, LOT 1

### **Notice to All Prospective Offerors**

This addendum is hereby made a part of the contract documents for Individual Wastewater System Replacement, Lalamilo Phase 1, Lot 1, IFB-16-HHL-007, and it shall amend the said contract documents as detailed within this Addendum document.

APPROVED:

N Satemoto						
Norman L. Sakamoto, Acting Administrator						
Land Development Division						
Department of Hawaiian Home Lands						
Please execute and immediately return the receipt below to the Department of Hawaiian Home Lands via facsimile to: (808) 620-9299, Mr. Stewart Matsunaga, Master Planned Community Development Manager, Land Development Division.						
Receipt of Addendum No. 2 for Individual Wastewater System Replacement, Lalamilo Phase 1, Lot 1, Invitation for Bids No.: IFB-16-HHL-007, is hereby acknowledged.  Print:						
(Name)	(Title)					
()	(==,					
Name of Firm/Company	Date					


### ADDENDUM NO. 2

## IFB NO.: IFB-16-HHL-007 Individual Wastewater System Replacement, Lalamilo Phase 1, Lot 1

#### **INCLUSIONS**

This Addendum No. 2 shall incorporate the following amendments to IFB-16-HHL-007:

- 1. 'Overall Site Plan (Figure 1), Rev 11-05-15' provided in Addendum No. 1 shall be replaced with 'Overall Site Plan (Figure 1), Rev 11-10-15'. (Enclosed).
  - Notes- 1) Existing treatment unit to be removed and backfilled; And,
    - 2) Existing seepage pit to be abandoned and backfilled.
- 2. 'Page 3, Bid Offer Form, Rev 11-5-15' provided in Addendum No. 1 shall be replaced with 'Page 3, Bid Offer Form, Rev 11-10-15'. (Enclosed).
- \*Summary Existing seepage pit improvements shall no longer be removed as noted in Addendum No. 1, but abandoned and backfilled in accordance with the original plans.

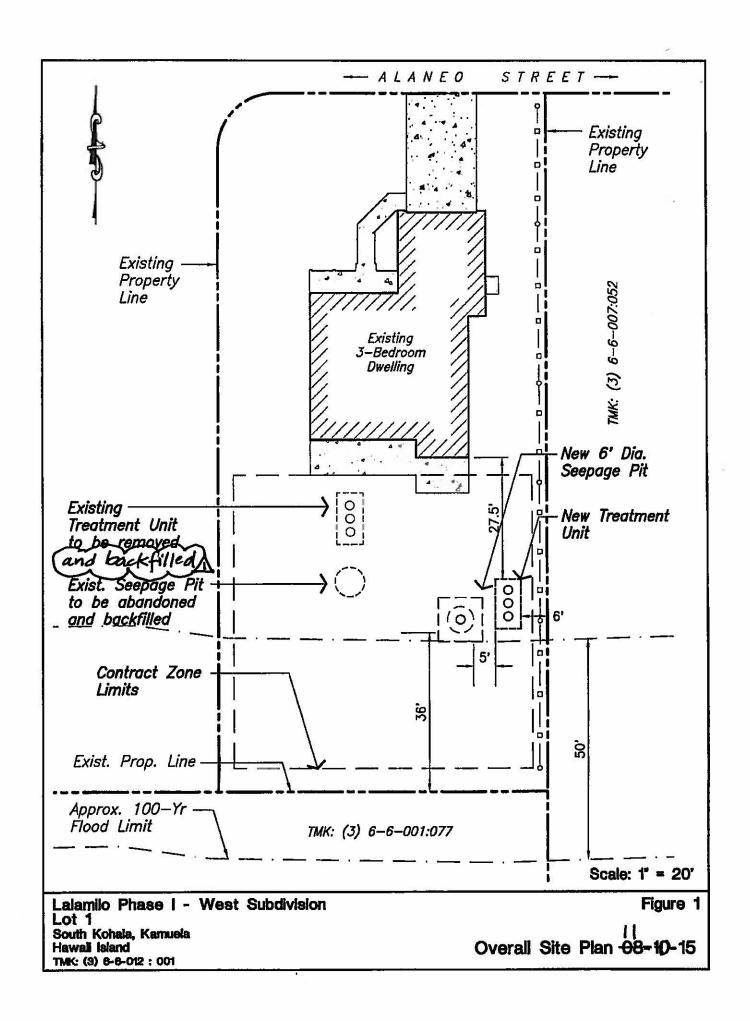

The following bid is hereby submitted for IFB-16-HHL-007 for the Department of Hawaiian Home Lands.

Item No.	Estimated Quantity	Description	Total
	WORK	Description	Total
1.	L.S.	<ol> <li>Excavation, removal and proper disposal of waste, existing aerobic septic tank, piping, lines and all other appurtenances from off of DHHL lands;</li> <li>Backfill using approved fill material; And,</li> <li>Erosion control, dust control, complete.</li> </ol>	
2.	L.S.	Excavation, waste removal, backfill of existing seepage pit (cesspool); including erosion control, dust control, handling, removal and disposal of debris off of DHHL lands, complete.	\$
		Lump Sum	
<ol> <li>4.</li> </ol>	L.S.	Installation of new aerobic septic tank (ESIS 1700 or equivalent) and appurtenances; including all trenching and piping from house to new aerobic septic tank, excavation, installation, testing, backfill, erosion control, dust control and removal and disposal of debris off of DHHL lands, complete.  Lump Sum  Installation of new seepage pit; including all trenching and piping from new aerobic septic tank, excavation, installation of concrete rings, testing, backfill, erosion control, dust control, and removal and disposal of debris off of DHHL lands, complete.  Lump Sum	\$ \$
		SUBTOTAL (Items 1 to 4, Inclusive)	\$
5. GENERAL EXCISE TAX (4.166% x SUBTOTAL)			\$
6. CONTINGENCY (10%) x (SUBTOTAL + GET)			\$